

TEMPLATE OF MICROSOFT WORD FORMAT FOR JCI ANNUAL CONVENTION PROCEEDINGS

Ichiro NIHON^{*1}, Jiro N. YAMADA^{*2}, Hana A. SMITH^{*3} and Taro SUZUKI^{*4}

ABSTRACT

Braided aramid fiber bar is used in pretensioned bond test. Local bond stress-local slip relationships were obtained from the strain distribution along the embedded bar. The embedded length was made large enough not to cause strain change at center of specimen. The local bond stress-slip relationship of braided aramid fiber bar varies with test method such as a pretensioned bond test, a pull bond test with long embedment and a pullout test with short embedment. The effect of concrete strength on the local bond stress-slip relationship differs with test method.

Keywords: aramid fiber, bond stress, pretensioned bond test, concrete strength, bond test

1. INTRODUCTION

Continuous fiber reinforcing materials such as braided aramid fiber bar and carbon fiber strand are going to be applied to concrete structures [1]. A design concept of concrete structures reinforced or prestressed with continuous fiber reinforcing materials has already been reported by JSCE committee [2]. However, bond characteristics between the reinforcing materials and concrete have not been clarified yet.

In the bond characteristics, a local bond stress-slip relationship is the most basic law for representing interaction between

.....

.....

.....

.....

.....

.....

.....

.....

.....

2. TEST PROGRAMS

2.1 Materials

(1) Reinforcing materials

Braided aramid fiber bars having 16.0 and 6.0 mm nominal diameter are used. The characteristics of reinforcements are shown in Table 1.....

.....

(2) Concrete

The specified concrete strength is 30MPa using maximum 20mm of coarse aggregate size and compressive strength and splitting tensile strength at 28 days are 33.2MPa and 2.56MPa, respectively.

2.2 Loading Method

The specimens are subjected to monotonic pull out load using.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

Table 1 Characteristics of reinforcements

| Type | Elastic | Tensile | Remark |
|----------|----------------------------------|----------------------------------|---------|
| | Modulus (kN/mm ²) | strength (N/mm ²) | |
| Braided | 59 | 1320 | Tendon |
| Braided | 59 | 1320 | Stirrup |
| Deformed | 178 | 684 | Tendon |
| Deformed | 200 | 994 | Stirrup |

*1 Associate Prof., Dept. of Civil Engineering, University of Nanboku, Dr.E., JCI Member

*2 Graduate School of Engineering, University of Tozai, JCI Student Member

*3 Engineering Researcher, Tokyo Office, Tozai Industries Ltd., M.E., JCI Member

*4 Group Leader, Structural Division, Nanboku Consultant Co.

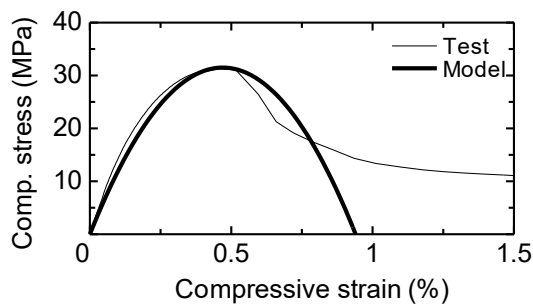


Fig.1 Stress - strain curves

The sectional area is given as follows:

$$A = V / l_0 \quad (1)$$

where,
 A : sectional area
 V : volume
 l_0 : length

The volume is obtained by measurements of test piece

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....text of the manuscript.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

3. CONCLUSIONS

- (1) Local bond stress-slip relationship of braided aramid fiber is
- (2) The specified concrete strength is 30MPa using maximum 20mm of coarse aggregate size and compressive strength and splitting tensile strength.

.....

.....

.....

.....

.....

ACKNOWLEDGEMENT

The authors acknowledge the supports of Nanboku University.

.....

REFERENCES

- [1] Davis, J. M., "Simplified Diaphragm Analysis," Journal of Structural Div., ASCE, Vol. 103, Nov. 1977, pp. 2098-2109.
- [2] Shanley, F. R., "Basic Structures," John Willey & Sons Inc., 1947, pp. 291-314.

- The bottom line of the text of double column format in the last page is set in a similar level as shown in this template.
- No figure, table or photograph is shown after the references.
- In the case of a 5-page manuscript, text lines in both columns should be 30 lines or more in the last page and the PDF file must include 6th page as a blank page.